


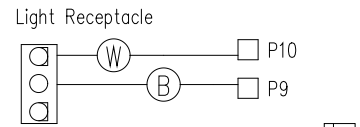










LEGEND

	- 1/4" QUICK CONNECT
	- 1/4" QUICK CONNECT PIGGYBACK
	- FORK CONNECTOR
	- RING CONNECTOR
	- SOCKET CONNECTOR
	- PIN CONNECTOR

33-0010-R5

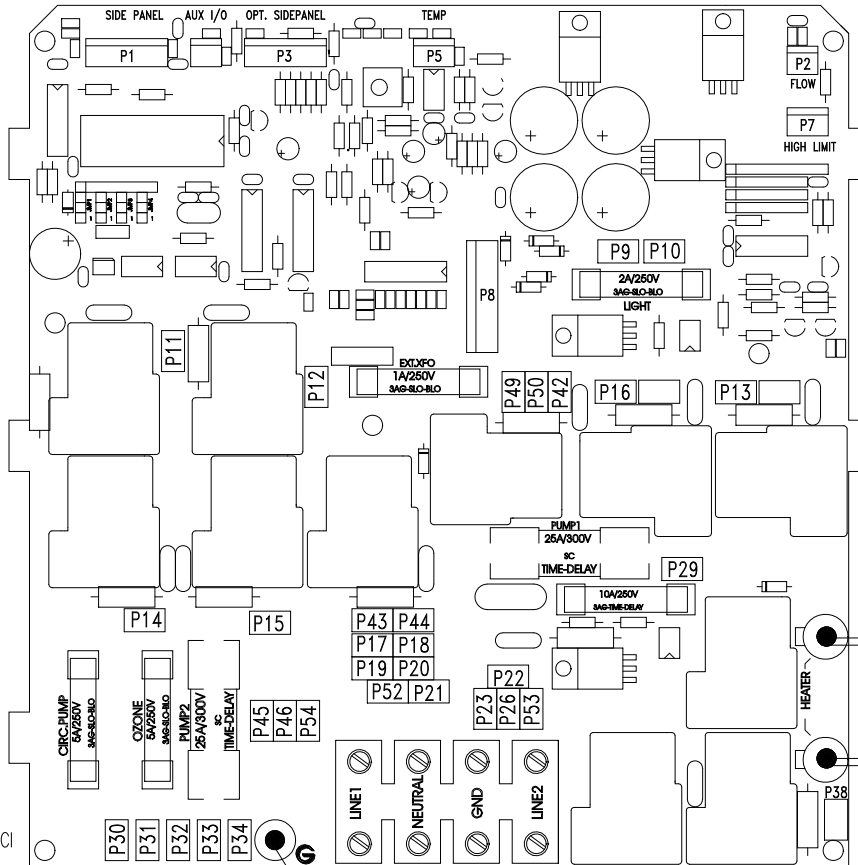

L1 N L2 GR

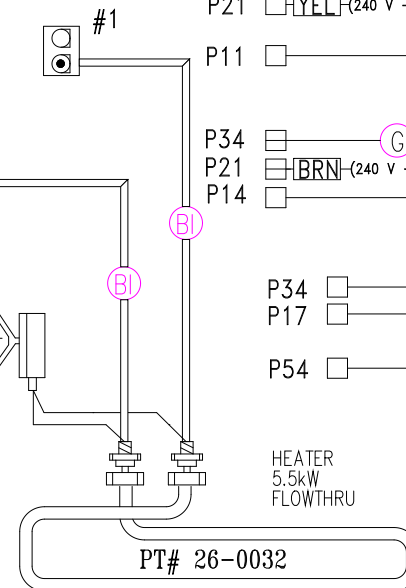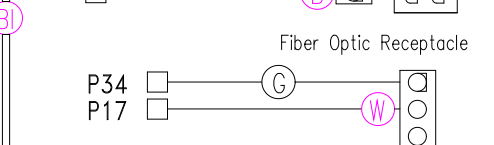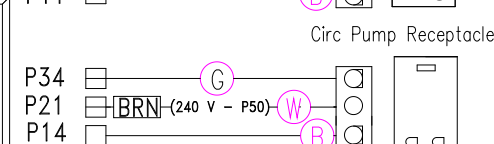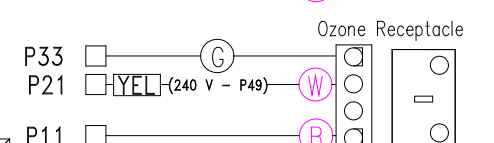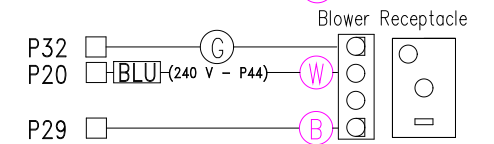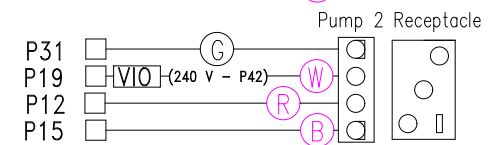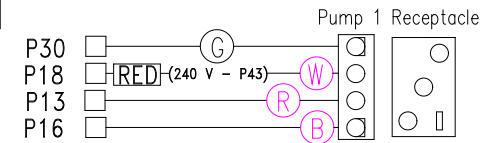

HYDRO-QUIP
CORONA, CA (909) 273-7575

Manufacture Notes:
For 240V operation of the heater, plug must be installed into 240V receptacle.
For 120V operation of the heater, plug must be installed into 120V receptacle.
Line 1 and 2 need to be SEPARATED for 240V operation.
Line 1 and 2 need to be CONNECTED for 120V operation.

Approved By:

Dwg. No.
CR21AH-KMPQY

Drawn
DJT
Date
6.5.01

Rev
7

Diagram No.
4500

Wire Color Code

B - Black	G - Green
Br - Brown	Bl - Blue
R - Red	V - Violet
O - Orange	W - White
Y - Yellow	Gr - Gray