


33-0011-R4

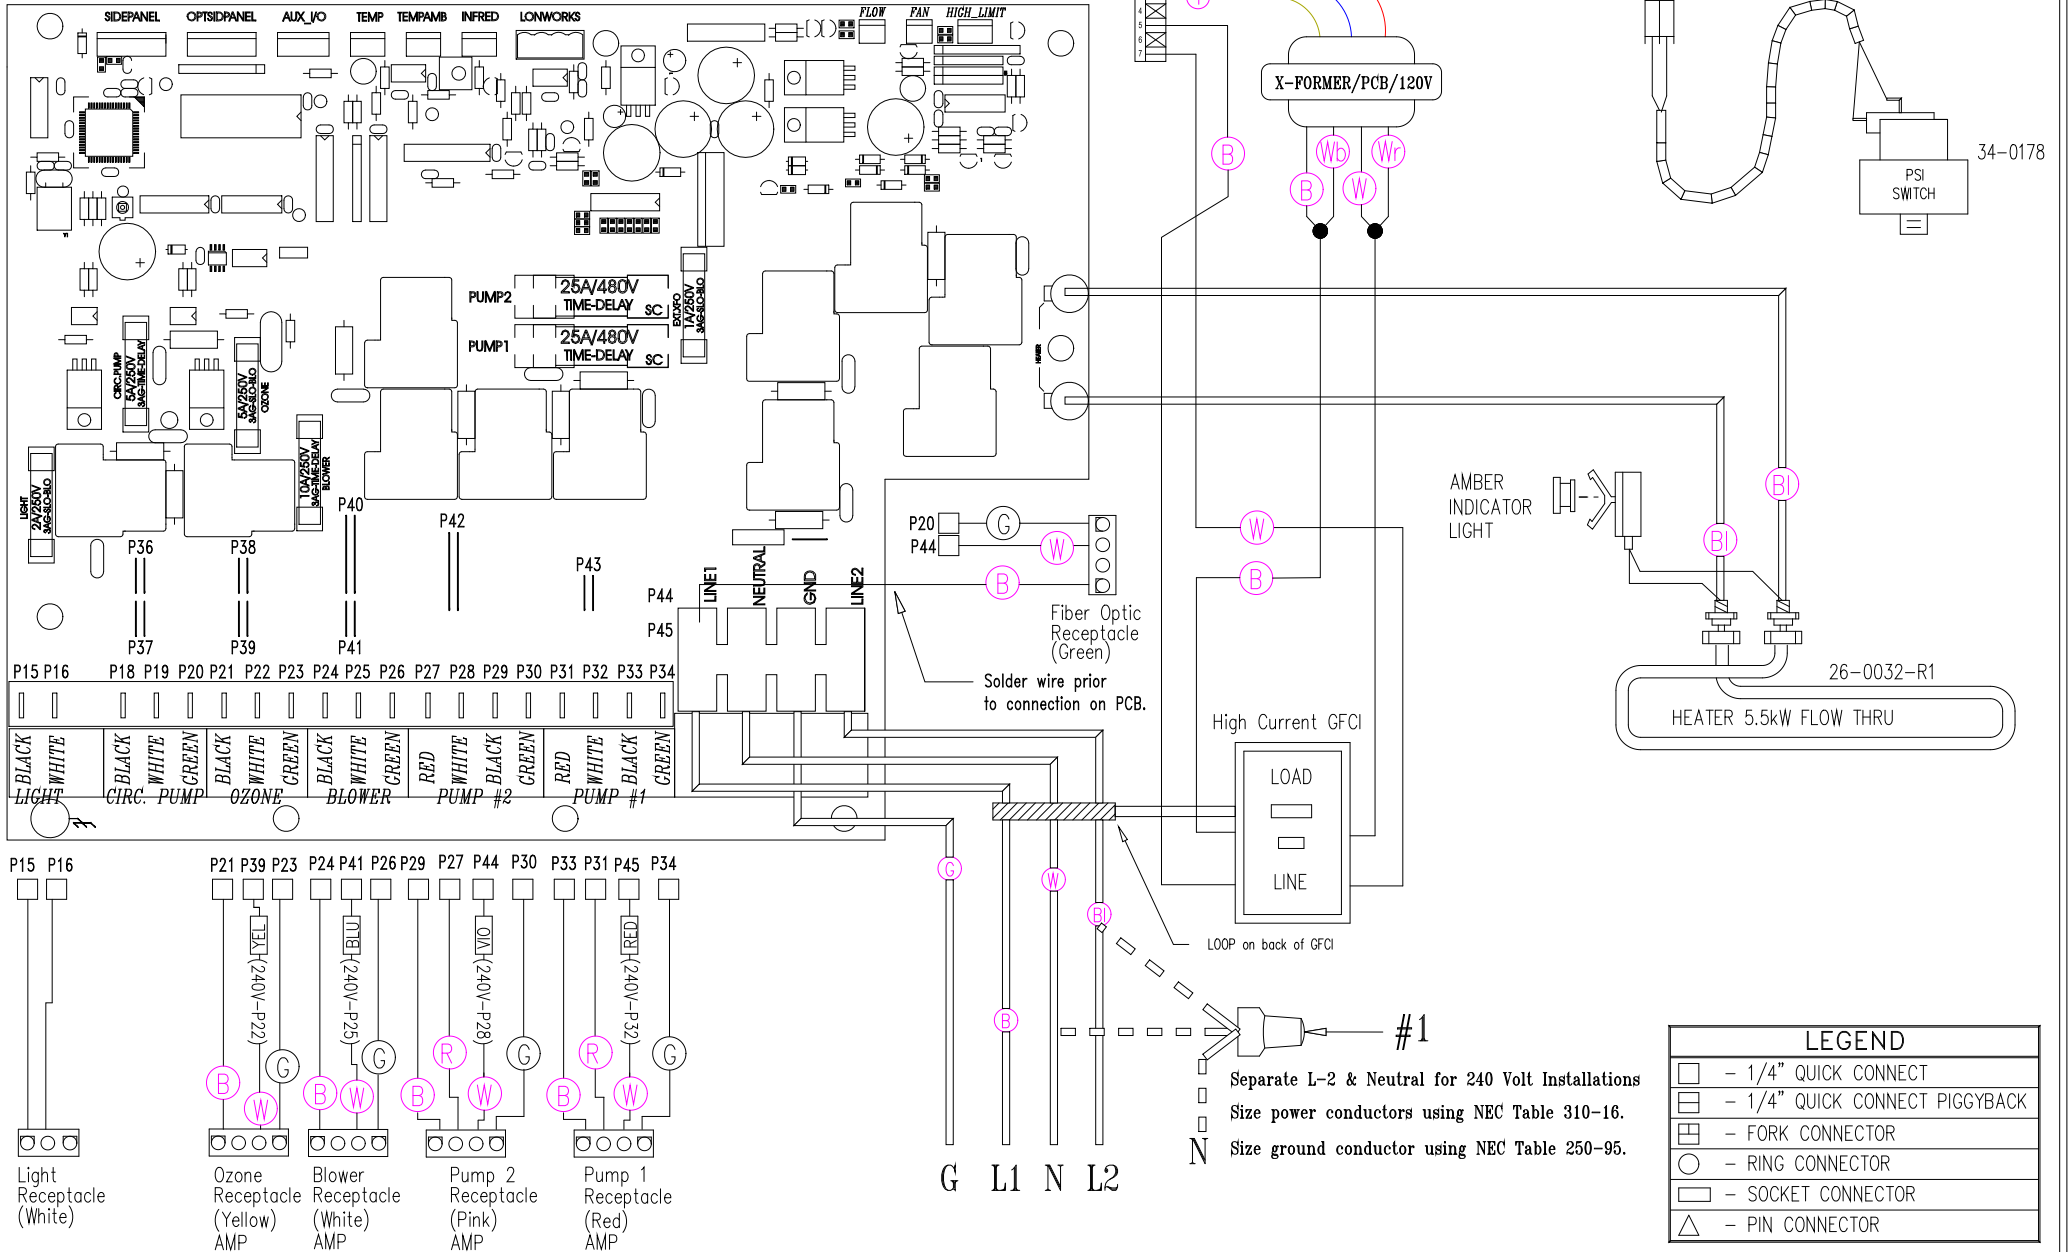

LEGEND	
□	- 1/4" QUICK CONNECT
▤	- 1/4" QUICK CONNECT PIGGYBACK
⊞	- FORK CONNECTOR
○	- RING CONNECTOR
◻	- SOCKET CONNECTOR
△	- PIN CONNECTOR

HYDRO-QUIP
CORONA, CA (909) 273-7575

Manufacture Notes: XXX Indicates the color of heat shrink to be used.

Approved By:

Dwg. No.
D556AH-DKPQY-Z

Drawn
BH

Rev
5

Wire Color Code

NOTE: 120 VAC operation requires programming to be set for Low Current Operation (CUO) and the elimination of Pump #2 so unit stays under 16 AMPS.

#1 For 120V Operation: Line 2 and Neutral must be connected.
For 240V Operation: Connection must be removed from Line 2 and Neutral

Date
06.14.01

Diagram No.
4608

B - Black	G - Green
Br - Brown	Bl - Blue
R - Red	V - Violet
O - Orange	W - White
Y - Yellow	Gr - Gray