


WIP

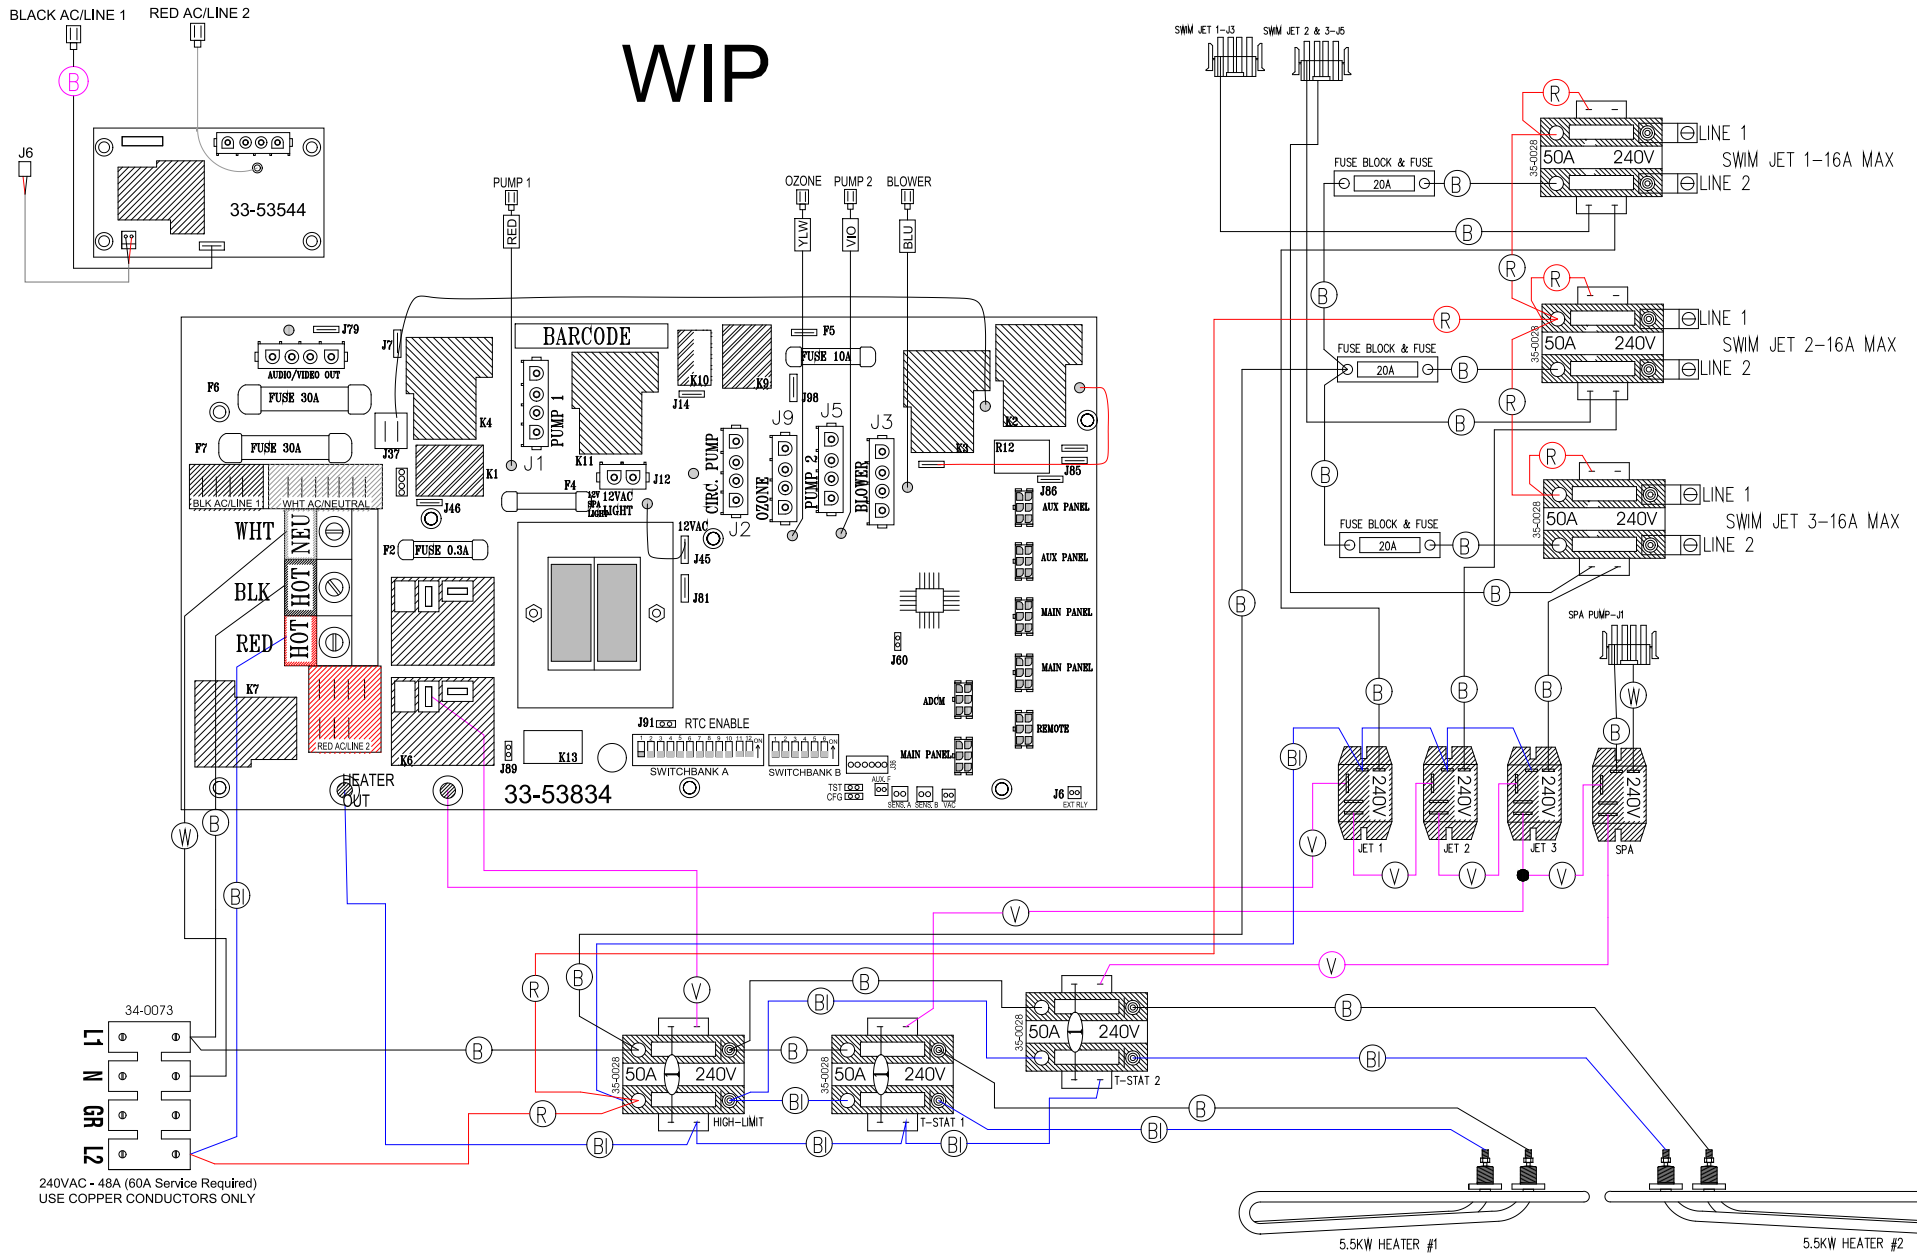

240VAC - 48A (60A Service Required)
USE COPPER CONDUCTORS ONLY

HYDRO-QUIP
CORONA, CA (951) 273-7575

Manufacture Notes:

DIP SWITCHES & PERSISTANT MEMORY: TO MAKE CHANGES TO THE CONFIGURATION DIP SWITCHES PERSISTANT MEMORY MUST BE RESET. 1) POWER SYSTEM OFF, 2)TURN SWITCH A12 "ON" AND MAKE DESIRED CHANGES TO THE DIP-SWITCH(S), 3) POWER SYSTEM BACK ON, LET THE SYSTEM BOOT UP COMPLETELY, CHECK THAT DESIRED CHANGES WERE MADE, 4) POWER SYSTEM OFF AND TURN SWITCH A12 "OFF" (IF USING A NON-CONDUCTIVE TOOL THE SWITCH MAY BE TURNED OFF WHILE THE POWER IS ON)

Dwg. No.
G822A0-KLPQY-J

Drawn
MBS


Rev
03

Date
12.07.15


Diagram No.
5173

Wire Color Code

B - Black	G - Green
Br - Brown	Bl - Blue
R - Red	V - Violet
O - Orange	W - White
Y - Yellow	Gr - Gray

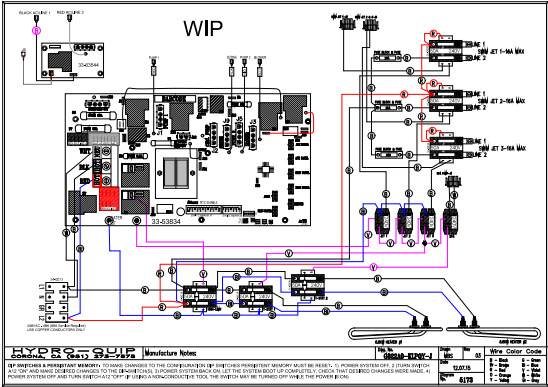

WIP

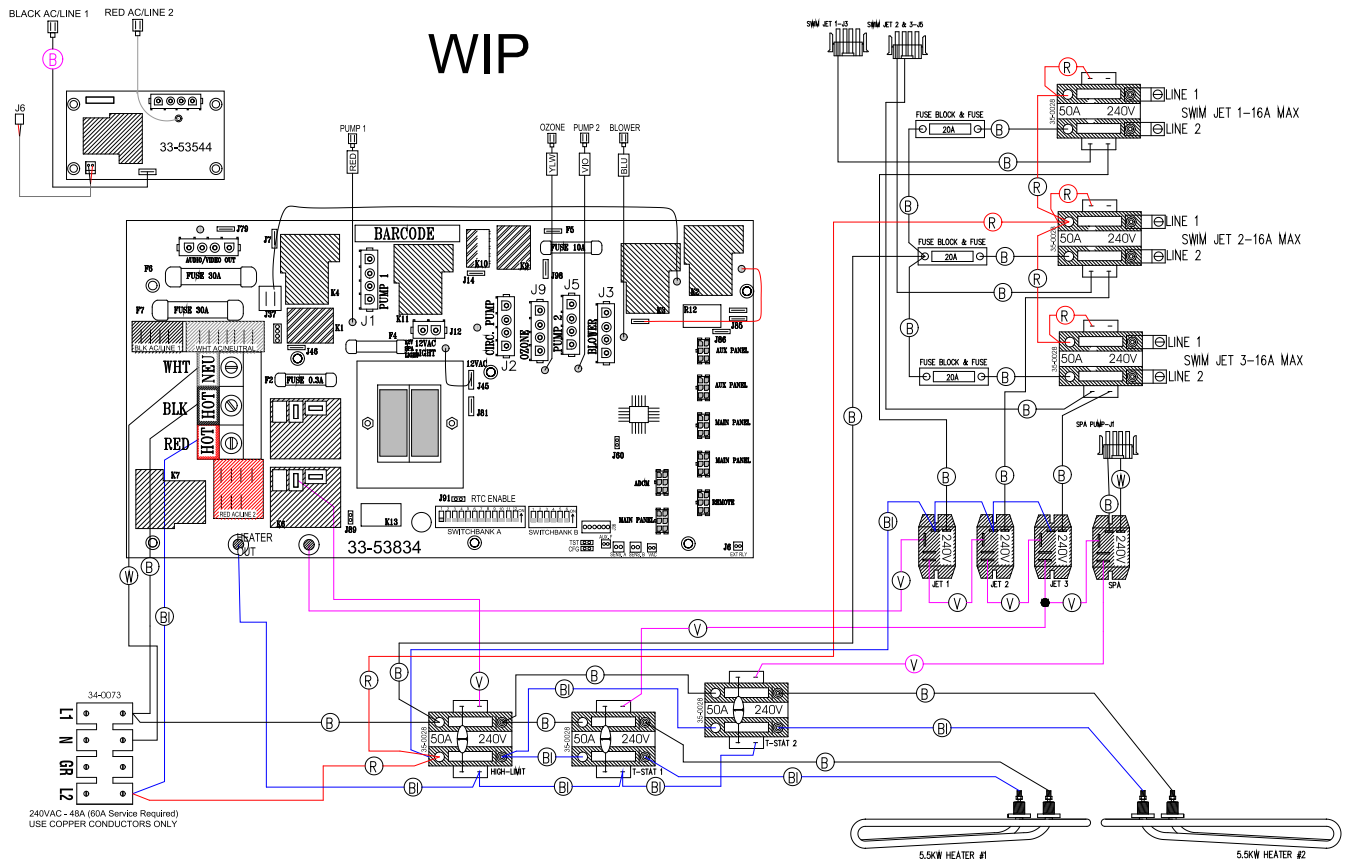

240VAC - 48A (50A Service Required)
USE COPPER CONDUCTORS ONLY

HYDRO-QUIP
CORONA, CA (951) 273-7575

Manufacture Notes:

DIP SWITCHES & PERSISTANT MEMORY: TO MAKE CHANGES TO THE CONFIGURATION DIP SWITCHES PERSISTENT MEMORY MUST BE RESET. 1) POWER SYSTEM OFF, 2) TURN SWITCH A12 "ON" AND MAKE DESIRED CHANGES TO THE DIP-SWITCH(S), 3) POWER SYSTEM BACK ON, LET THE SYSTEM BOOT UP COMPLETELY, CHECK THAT DESIRED CHANGES WERE MADE, 4) POWER SYSTEM OFF AND TURN SWITCH A12 "OFF" (IF USING A NON-CONDUCTIVE TOOL THE SWITCH MAY BE TURNED OFF WHILE THE POWER IS ON)

Dwg. No.	Rev	Wire Color Code
G822A0-KLPQY-J	03	B - Black G - Green Br - Brown Bl - Blue R - Red V - Violet O - Orange W - White Y - Yellow Gr - Gray
Date	Diagram No.	
12.07.15	5173	