


# 33-0011-R4

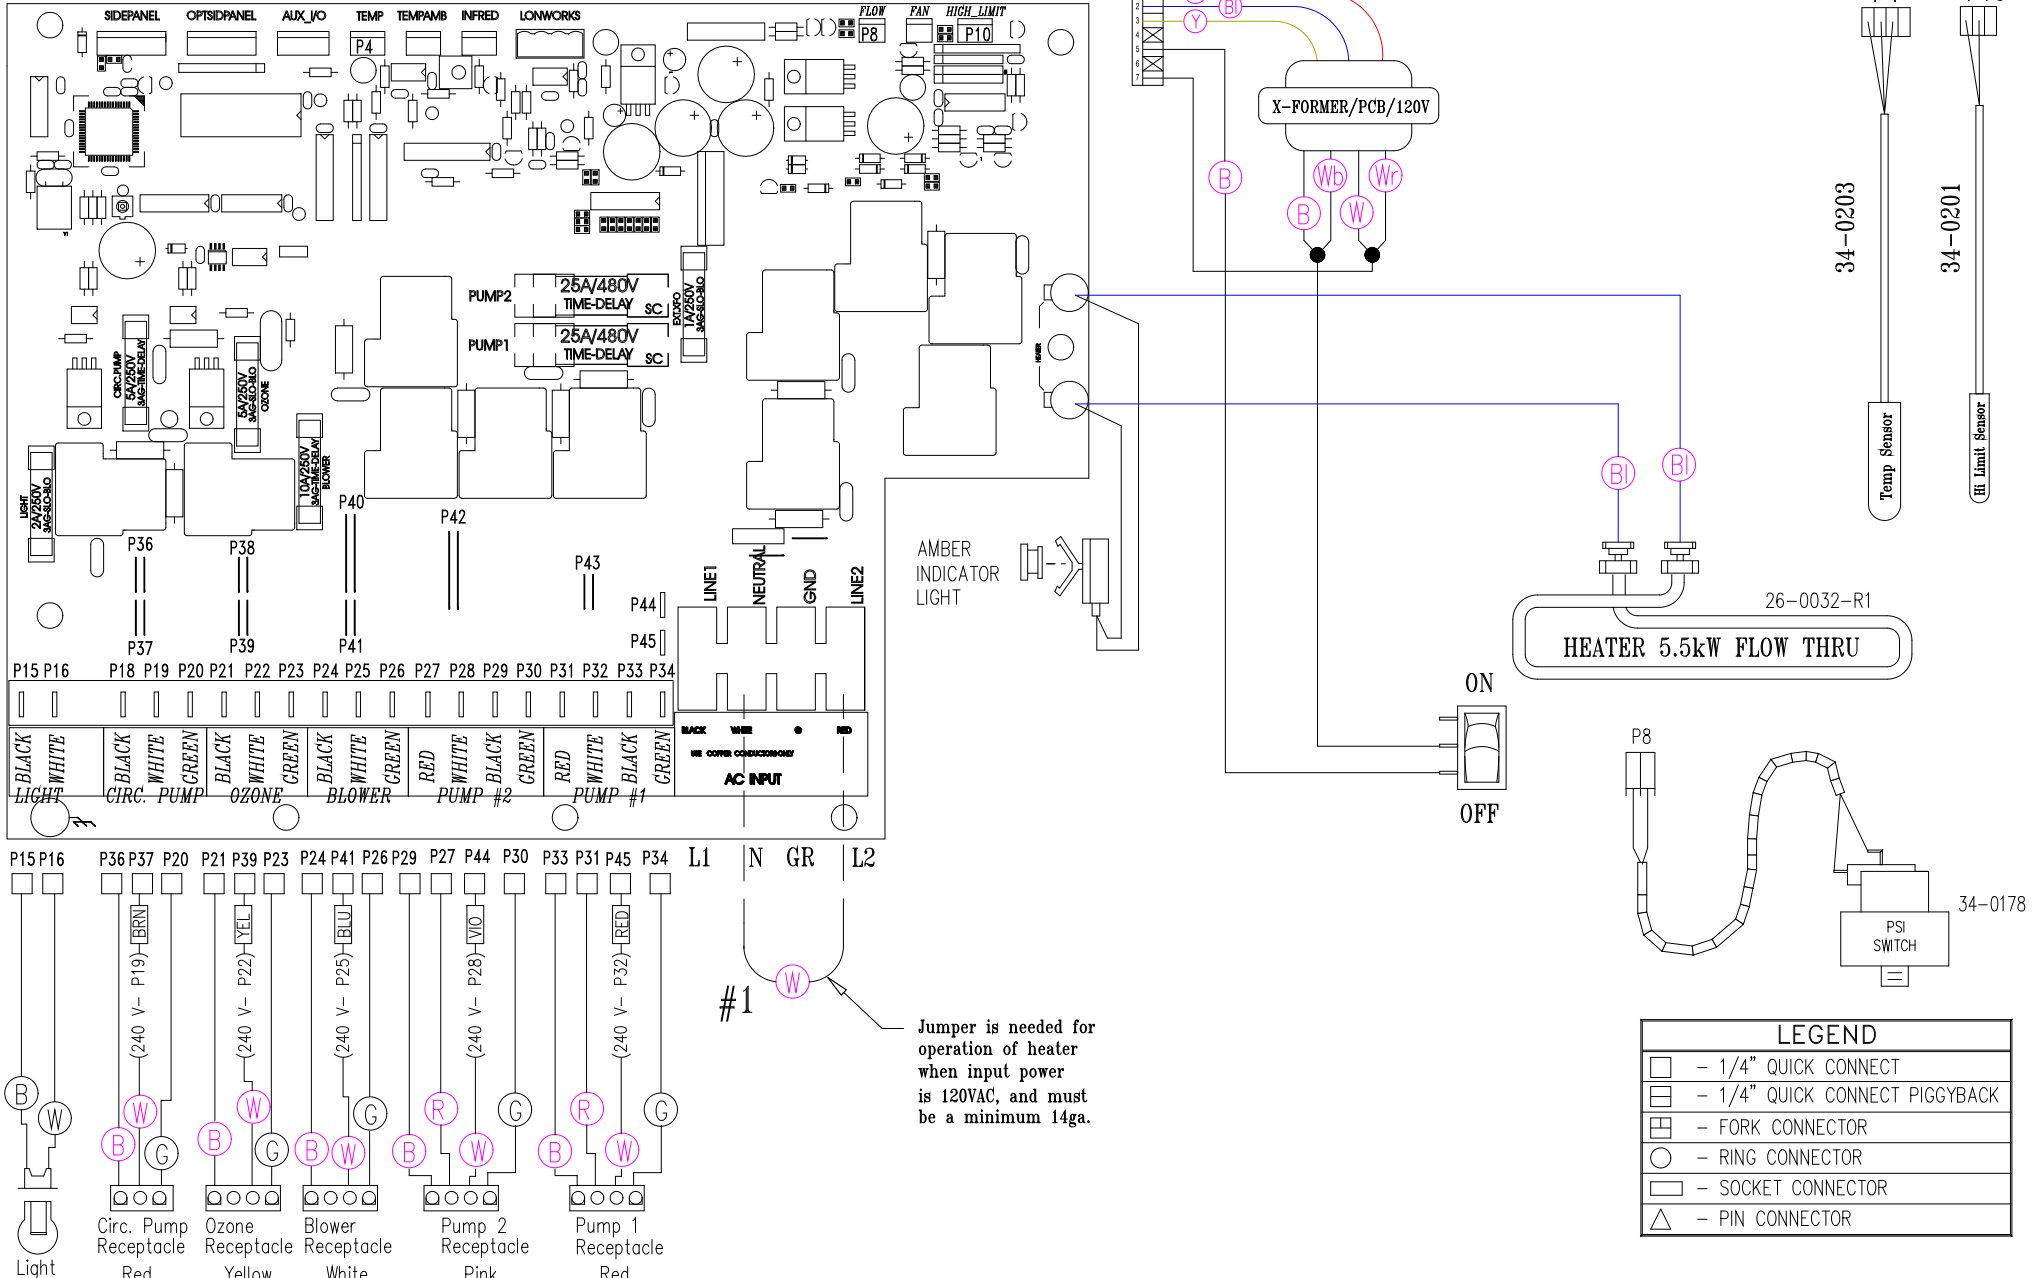

#1  
 Jumper is needed for operation of heater when input power is 120VAC, and must be a minimum 14ga.

LEGEND	
	- 1/4" QUICK CONNECT
	- 1/4" QUICK CONNECT PIGGYBACK
	- FORK CONNECTOR
	- RING CONNECTOR
	- SOCKET CONNECTOR
	- PIN CONNECTOR

**HYDRO-IQUIP**  
 CORONA, CA (909) 273-7575

Manufacture Notes: XXX Indicates the color of heat shrink to be used.

Dwg. No.  
**D5S56A0-DKMPQY8**

Drawn  
 CDV  
 Date  
 6.14.01

Rev  
 3

Wire Color Code	
B - Black	G - Green
Br - Brown	Bl - Blue
R - Red	V - Violet
O - Orange	W - White
Y - Yellow	Gr - Gray

**NOTE:** 120 VAC operation requires programming to be set for Low Current Operation (CUO) and the elimination of Pump #2 so unit stays under 16 AMPS.

#1 For 120V Operation: The jumper must be placed between Line 2 and Neutral  
 For 240V Operation: The jumper must be removed from Line 2 and Neutral

Diagram No.  
**6601**