


DIPSWITCH SETTINGS

#	MODE	ON	OFF
S1	30A / 50A	30A	50A
S2	120V or 12V Spa Light	120V	12V
S3	Circ. / No Circ. Pump	Circ.	No Circ.
S4	Aux. Freeze	Must Be Off	
S5	Pump 1 - 1 or 2 Speed	1 Spd	2 Spd
S6	N/A	N/A	N/A
S7	Pump 2 - 1 or 2 Speed	1 Spd	2 Spd
S8	Degrees C / F	C	F
S9	1 or 2 Pump System	1 Pump	2 Pump
S10	N/A	N/A	N/A

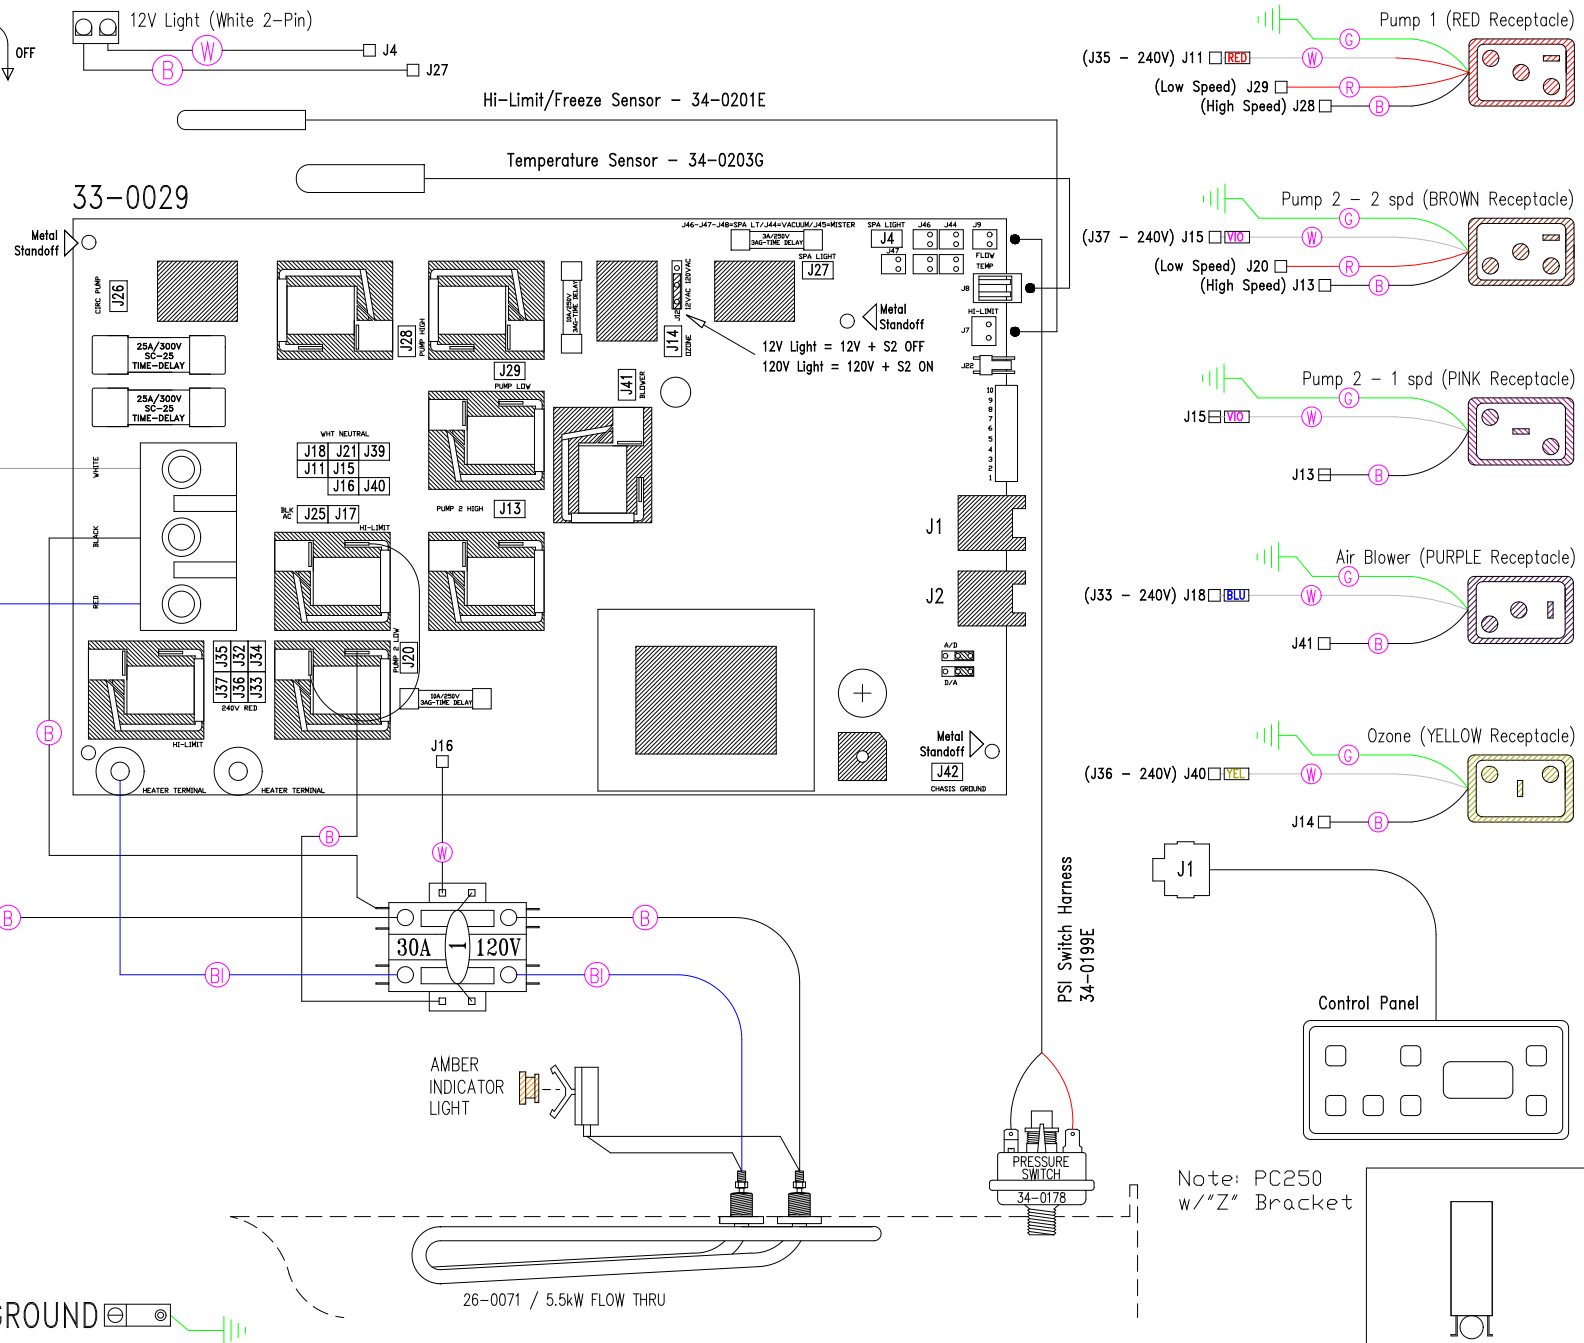

Note: PC250 w/"Z" Bracket

**HYDRO-QUIP**  
CORONA, CA (951) 273-7575

Manufacture Notes:

Universal Wiring - All WHITE/NEUTRAL wires have color-coded terminal insulation for easy identification. WITH POWER TURNED OFF - simply move white/neutral wire from its Neutral position (see receptacle terminal I.D.) and move to the 240V position.

Control Box:	66-	Dwg. No.	DS22110-DKMPQY	Drawn	GC	Rev	2	Wire Color Code
Date	01.17.07		Diagram No.	6650A		B - Black Br - Brown R - Red O - Orange Y - Yellow		
G - Green Bl - Blue V - Violet W - White Gr - Gray								