



DIPSWITCH SETTINGS

#	MODE	ON	OFF
S1	30A / 50A	30A	50A
S2	120V or 12V Spa Light	120V	12V
S3	Circ. / No Circ. Pump	Circ.	No Circ.
S4	Aux. Freeze	Must Be Off	
S5	Pump 1 - 1 or 2 Speed	1 Spd	2 Spd
S6	N/A	N/A	N/A
S7	Pump 2 - 1 or 2 Speed	1 Spd	2 Spd
S8	Degrees C° / F°	C°	F°
S9	1 or 2 Pump System	1 Pump	2 Pump
S10	N/A	N/A	N/A

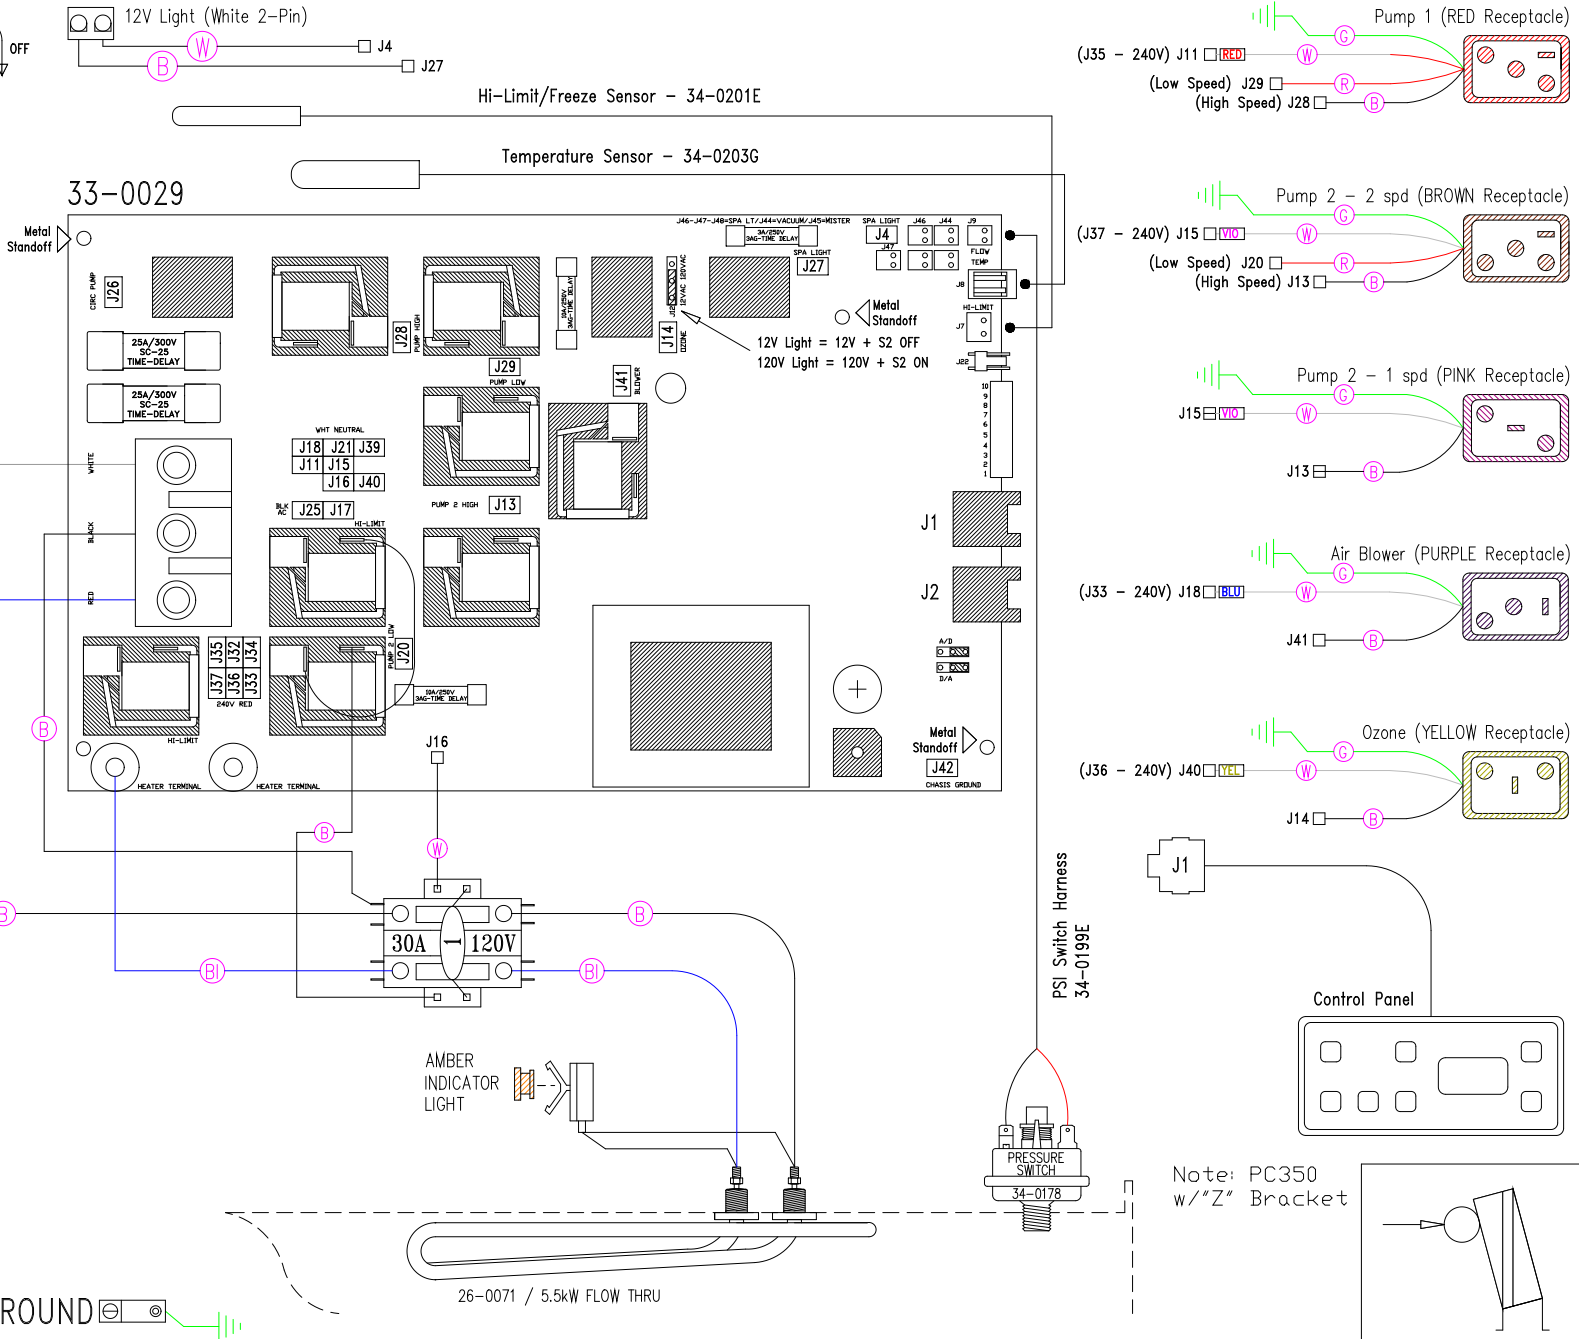

Note: PC350 w/"Z" Bracket



HYDRO-QUIP
CORONA, CA (951) 273-7575

Manufacture Notes:

Universal Wiring - All WHITE/NEUTRAL wires have color-coded terminal insulation for easy identification. WITH POWER TURNED OFF - simply move white/neutral wire from its Neutral position (see receptacle terminal I.D.) and move to the 240V position.

Control Box: 66-

Dwg. No. DS22110-DKMPQY

Drawn GC

Rev 2

Wire Color Code

B - Black	G - Green
Br - Brown	Bl - Blue
R - Red	V - Violet
O - Orange	W - White
Y - Yellow	Gr - Gray

Date 01.17.07

Diagram No. 6650B