


**DIPSWITCH SETTINGS**

1	2	3	4	5	6	7	8	9	10
#	MODE	ON	OFF						
S1	30A / 50A	30A	50A						
S2	120V or 12V Spa Light	120V	12V						
S3	Circ. / No Circ. Pump	Circ.	No Circ.						
S4	Aux. Freeze	Must Be Off							
S5	Pump 1 - 1 or 2 Speed	1 Spd	2 Spd						
S6	N/A	N/A	N/A						
S7	Pump 2 - 1 or 2 Speed	1 Spd	2 Spd						
S8	Degrees C° / F°	C°	F°						
S9	1 or 2 Pump System	1 Pump	2 Pump						
S10	N/A	N/A	N/A						

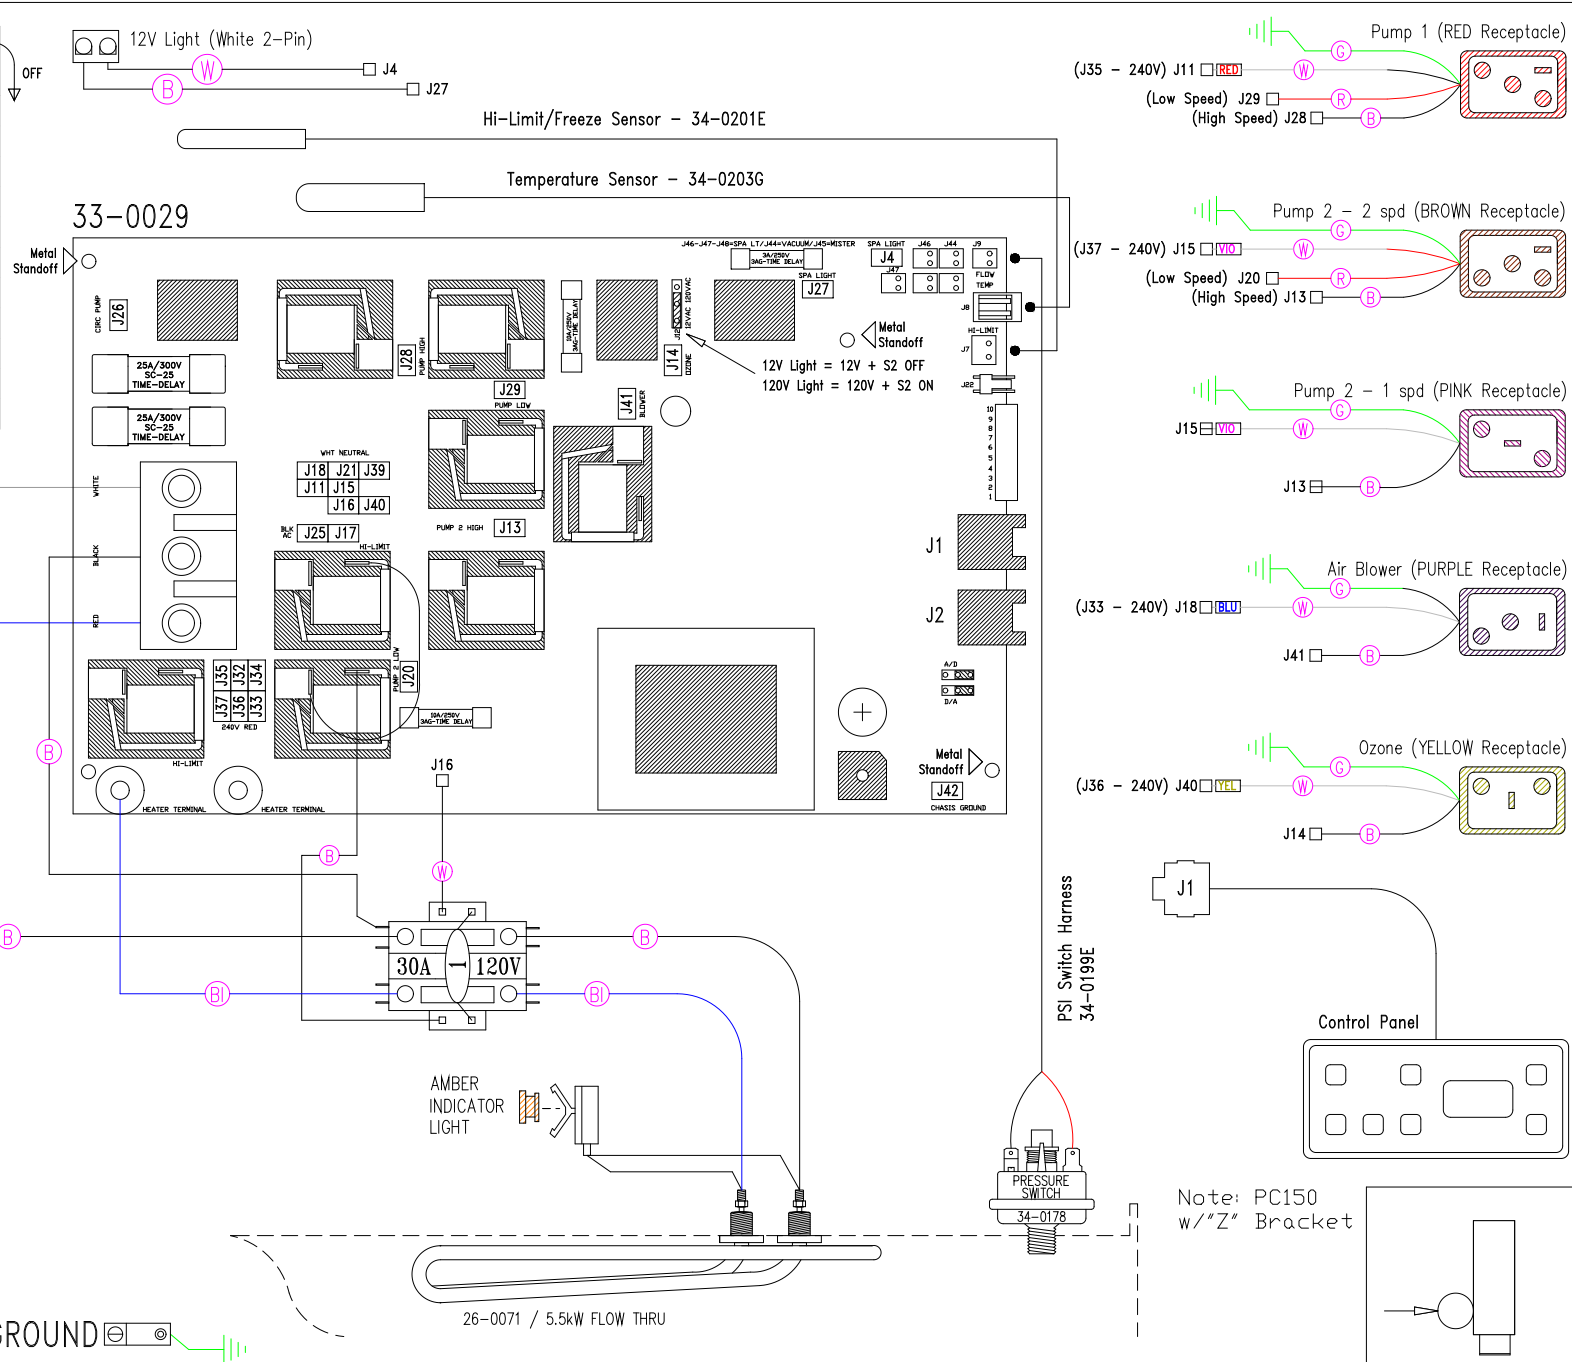

**HYDRO-QUIP**  
CORONA, CA (951) 273-7575

Manufacture Notes:

Universal Wiring - All WHITE/NEUTRAL wires have color-coded terminal insulation for easy identification. WITH POWER TURNED OFF - simply move white/neutral wire from its Neutral position (see receptacle terminal I.D.) and move to the 240V position.

Dwg. No. <b>DS22110-DKMPQY</b>	Drawn GC	Rev 2	Wire Color Code
Date 01.17.07	Diagram No. <b>6650</b>		B - Black      G - Green Br - Brown    Bl - Blue R - Red        V - Violet O - Orange    W - White Y - Yellow     Gr - Gray