


Components inside dotted lines are located on faceplate.

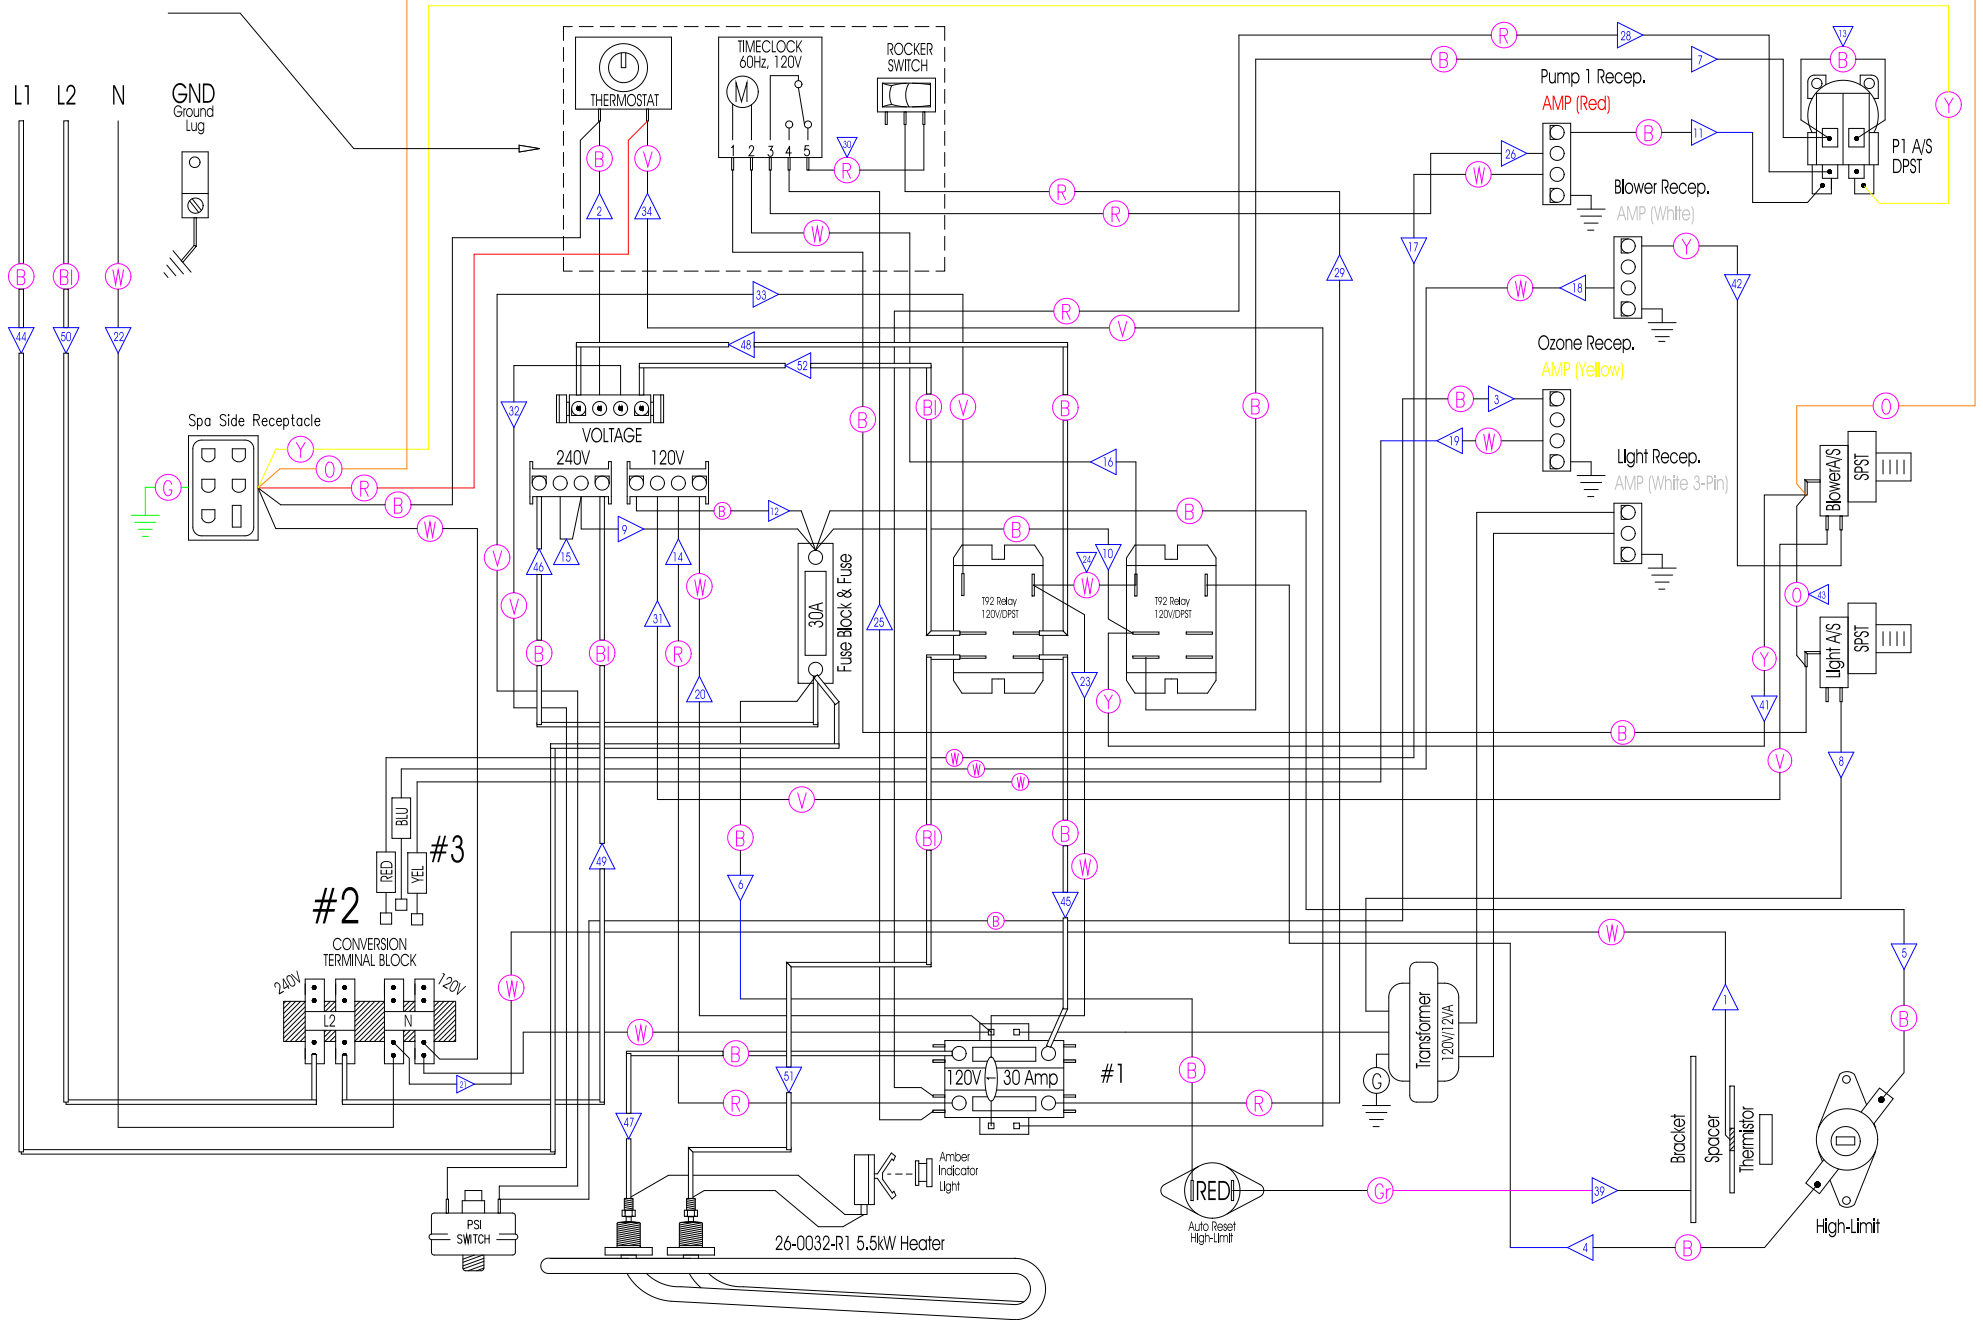

HYDROQUIP™
 13345 Estelle Street Corona, CA 92879
 Phone: (909) 273-7575 Fax: (800) 332-7190

Manufacture Notes: *Component wiring is set at the factory default of 120 VAC unless otherwise noted.
 NOTE #1 - □ Connected to Neutral side of Universal Terminal Block (some models preconfigured at factory to 240VAC).
 NOTE #1 - XXXX Denotes the color of heat shrink used.
 NOTE #1 - (RED) on Contactor indicates Capacitor.

Dwg. No.: 506G0-DKQ-Z5
 Approved By:
 Date: 08/29/02
 Diagram No.: 8103

Wire Color Code
 B - Black G - Green
 Br - Brown Bl - Blue
 R - Red V - Violet
 O - Orange W - White
 Y - Yellow Gr - Gray