


Components inside dotted lines are located on faceplate.

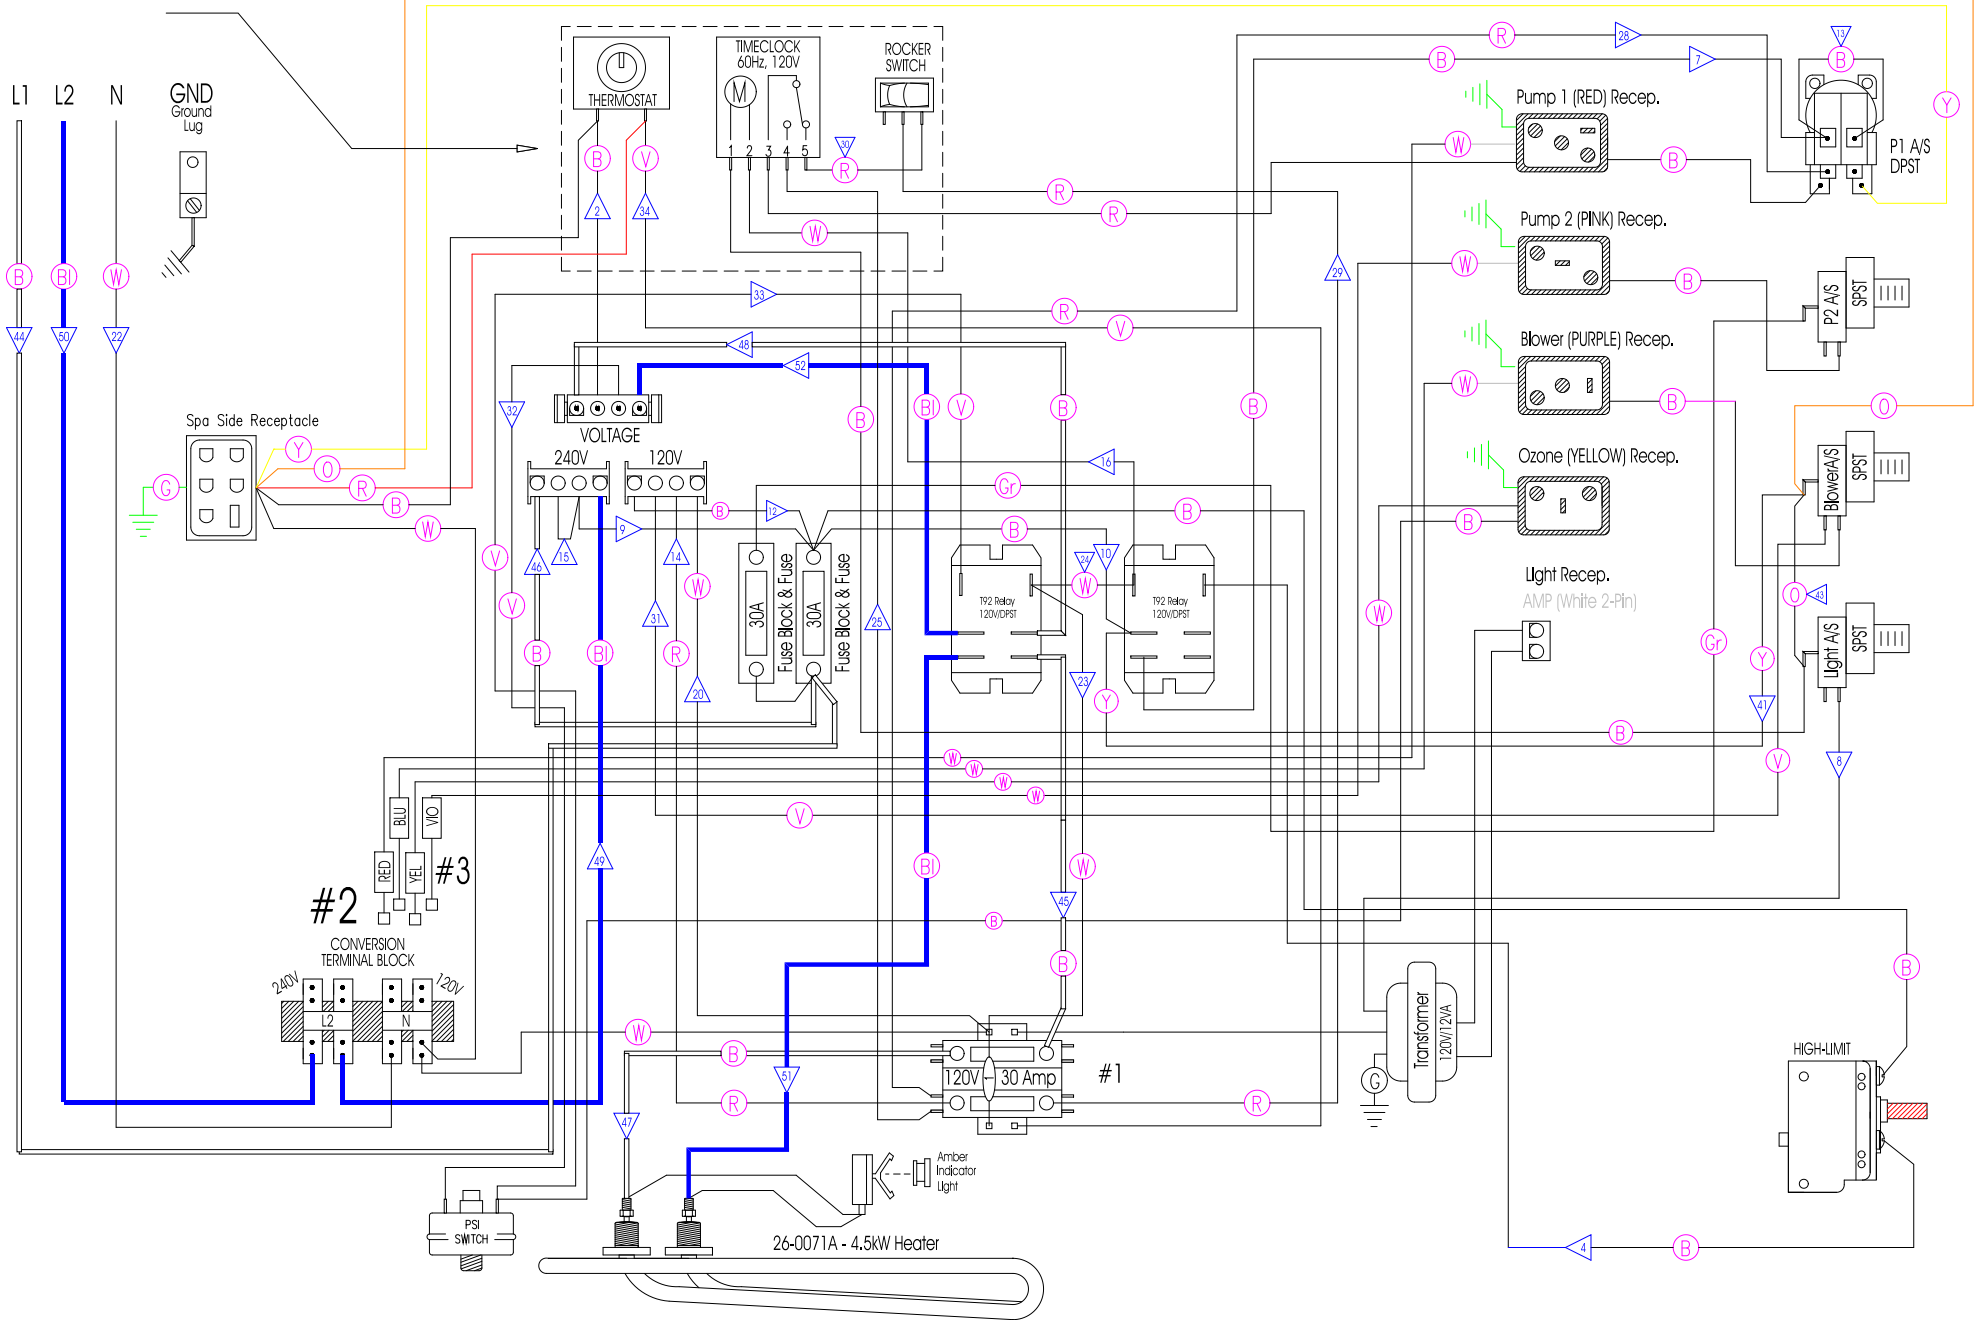

HYDROQUIP™
 13345 Estelle Street Corona, CA 92879
 Phone: (909) 273-7575 Fax: (800) 332-7190

Manufacture Notes: *Component wiring is set at the factory default of 120 VAC unless otherwise noted.
 NOTE #1 - □ Connected to Neutral side of Universal Terminal Block (some models preconfigured at factory to 240VAC).
 NOTE #1 - XXXX Denotes the color of heat shrink used.
 NOTE #1 - ⊕ on Contactor indicates Capacitor.

Dwg. No.: 553G0-BDKQ-Z	Drawn: BH	Rev.: 3
Approved By:	Date: 05.05.08	
	Diagram No.: 8107	

Wire Color Code	
B - Black	G - Green
Br - Brown	Bl - Blue
R - Red	V - Violet
O - Orange	W - White
Y - Yellow	Gr - Gray